



GC2 Security & Home Automation Platform

Model #: 2GIG-CP21-345

FULL VOICE RESPONSE

The panel gives clear notifications that indicate system status, zone descriptions, alarms, and emergencies.

DATE, TIME & WEATHER DISPLAY*

With a touch, scroll through the date, time, and daily weather forecast. Has the ability to receive messages, including severe weather warnings.

QUICK ACCESS

The one touch access buttons allow the quickest help possible in an emergency. The panel's LED lit buttons indicate the system's status.

USER FRIENDLY LCD TOUCH SCREEN

The easy-to-use color touch screen puts a wide range of security and home automation controls at your fingertips.

MULTIPLE ARMING OPTIONS

Secure your home by arming your system "AWAY" or "STAY." The Quick Arm/Exit and Bypass features offer added convenience.

*Requires an active account with a compatible back-end service provider

SPECIFICATIONS

- 60 wireless zones
- 2 wired zones
- Supports 8 Wireless Key Ring remotes and 4 Wireless Keypads
- Built-in Z-Wave radio
- Z-Wave Device to Device Association
- Full voice response
- Remote over-the-air (OTA) software updates*
- 64 user codes
- Chime by zone with multiple chime settings
- UL 1610 Central-Station Burglar Alarm Compliance

HOME AUTOMATION

The built in Z-Wave radio makes it easy to add home automation conveniences including HVAC, appliance, lighting, and door/lock control.

TWO-WAY RESPONSE OVER CELLULAR*

Two-way voice lets central station operators listen in and talk to you when a signal is received, ensuring that the proper emergency response personnel will be dispatched if necessary.

CONVENIENCE


The fully self-contained panel contains a backup battery, and allows 64 user codes to monitor up to 60 wireless zones plus 2 wired zones.

OVER-THE-AIR UPDATES*

There's no need to worry about the panel's software becoming outdated. With our Over-the-Air (OTA) function, the panel can be remotely updated with the latest software.

REMOTE CONTROL OPTIONS*

Always be in control by remotely managing your system from a computer or web-enabled smart phone.

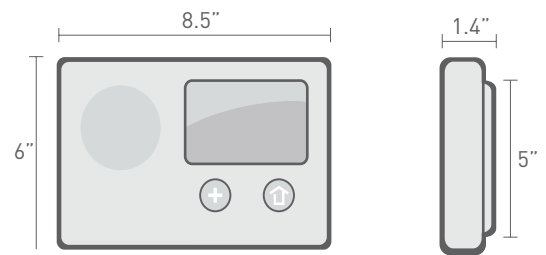

TOUCH SCREEN DIMENSIONS: 3.75" X 2.25"

ELECTRICAL

Voltage

Panel Input	14VDC @ 1.7 A Max
AC Adapter In	100-240 VAC~50/60 Hz @ 68 mA Max

Rechargeable Backup Battery

2000 mAh @ 7.2V Ni-MH battery pack (included)
2400 mAh @ 7.2 Ni-MH battery pack (optional)

Alarm Sounder

85 dB at 10ft

MODEL NUMBERS:

- | | |
|---------------------------|--|
| 2GIG-CP21-345E (English) | 2GIG-CP21-345C (French Canadian) |
| 2GIG-CP21-345E2 (English) | 2GIG-CP22-345B (Brazilian Portuguese – not for US) |
| 2GIG-CP21-345S (Spanish) | |

